




SHOULDICE
STONE

TECHNICAL DETAILS

424 Tapestry Sill

PRODUCT DRAWINGS

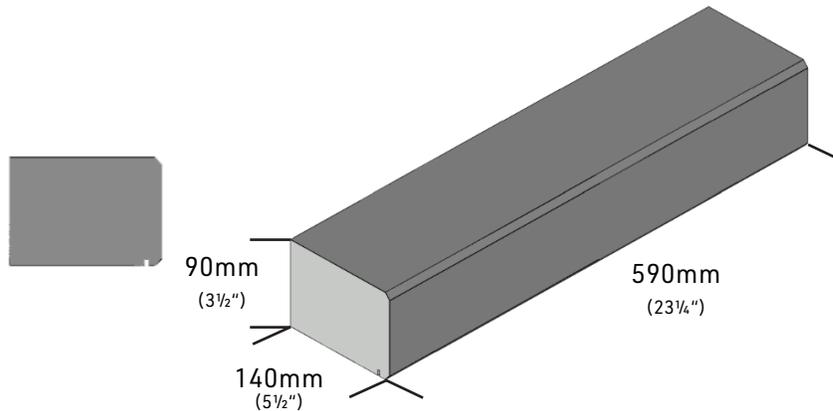

PRODUCT DETAILS

	Metric	Imperial
Selling UoM		EA
Units/Skid	77ea	77ea
Weight/Each	14.3kg	31.54lbs
Weight/Skid	1,122kg	2,469lbs
# of Layers	7	7
Pieces/Layer	30	30
Coverage/Unit	0.020m ²	0.22sf
Coverage/Skid	1.57m ²	16.94sf
Linear Unit per Piece	0.07m ²	0.22lf
Pallet Size	101cmx119cm	40"x48"

CORNERS

Corners are included
100% of the units are corners

TYPICAL INSTALLATION

CODES & STANDARDS

Shouldice Stone Products are supported by the following National Codes & Standards. Refer to local building codes and standards to confirm best practice.

CANADIAN

CSA A165 Standards on Concrete Masonry Units
CSA A371 Masonry Construction for Buildings
CSA A179 Mortar and Grout for Unit Masonry
CSA A370 Connectors for Masonry

AMERICAN

ASTM C55 Specification for Concrete Building Brick
ASTM C90 Specification for Loadbearing Concrete Masonry Units
ASTM C270 Specification for Mortar for Unit Masonry
ASTM C476 Specification for Grout for Masonry
ASTM C1634 Specification for Concrete Facing Brick and Other Concrete Masonry Facing Units

NCMA TEK 8-4A Cleaning Concrete Masonry
NCMA TEK 9-1A Mortars for Concrete Masonry
NCMA TEK 8-3A Control and Removal of Efflorescence
NCMA TEK 10-4 Crack Control for Concrete Brick and other Concrete Masonry Veneers
NCMA TEK 19-5A Flashing Details for Concrete Masonry Walls

TYPICAL UNIT PROPERTIES

Products exceed the CSA and ASTM standards.

	Standard	Compression Strength	Absorption	Density	Fire Rate (Hours)
CSA	A165.2	>25mpa	<8%	>2000kg/m ²	1.4
ASTM	C1634	>3000psi	<12lb/ft ³	>125lb/ft ³	

CONTACT US

For technical questions regarding our product line please contact our knowledgeable customer service team. By phone: **800.265.3174** or email: **designer@shouldice.ca**